


AFFINIUM®LED POSTERBOX LPM400

The Koledo Affinium LED posterbox 400 series includes 4 LED and 6 LED versions. This latest generation Posterboxes gives you twice the light. Patented high quality










AFFINIUM®LED POSTERBOX LPM400

SPECIFICATIONS


PRODUCT	COLOR TEMP	LUMEN OUTPUT	LEDS/PITCH	POWER	INGRESS PROTEC	CASETEMP @60°C	CRI	AMBIENT TEMP	LV
	K	Lm	pcs/mm	W	IP	°C		°C	Cd
Affinium® LPM400 4leds 6300K	6300 +/-200	790	4/96	11	66	80	85	-20/60	3260
Affinium® LPM400 6leds 6300K	6300 +/-200	1088	6/96	15	66	80	85	-20/60	4500
Affinium® LPM400 4leds 4000K	4000 +/-200	738	4/96	11	66	80	85	-20/60	3050
Affinium® LPM400 6leds 4000K	4000 +/-200	1065	6/96	15	66	80	85	-20/60	4400
Affinium® LPM400 4leds 2700K	2700 +/-200	525	4/96	11	66	80	85	-20/60	2170
Affinium® LPM400 6leds 2700K	2700 +/-200	890	6/96	15	66	80	85	-20/60	3680

DIMENSIONS (MM)

DIMENSIONS	A1	A2	B1	C1	# LED'S
	mm	mm	mm	mm	
4leds	371	351	37,5	16	4
6leds	562	542	37,5	16	6

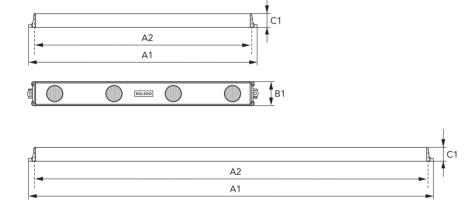

KOLEDO













All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication there of does not convey nor imply any license under patent- or other industrial or intellectual property rights.



KOLEDO.EU • EKKERSRIJT 7051 • 5692 HB SON THE NETHERLANDS • +31 40 23 50 112 DEVELOPED AND MANUFACTURED USING PHILIPS TECHNOLOGY